

# OKIN Commander ADC

Page 1/3



A Phoenix Mecano Brand

The OKIN Commander ADC gateway enables the use of Amazon Alexa voice control for motion seating furniture products using select OKIN direct switching systems. Simple inline DIN to DIN design makes installation easy. Mobile App configuration utility for iOS and Android.



Note: Responsibility for OKIN products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which OKIN products are fitted. We accept no liability for the correctness.

OKIN America, Inc. • 291 C D F Blvd • Shannon, MS • 38868  
Phone: +49 (0)52 23 / 9 79 -0 • Fax: +49 (0)52 23 / 7 51 82 • Email: [info@okin.de](mailto:info@okin.de) • Internet: <http://www.okin.de>

## Standard Configurations

### Performance data

Operating	Power Supply	Standby Current	Operating Current	Standby Watts	Operating Watts
	29VDC	30mA	2A	.87W	58W

### Components

Housing color	housing upper part: black RAL 9005 housing lower part: black RAL 9005
Connector version	5 Pin to 5 Pin DIN Connector 7 Pin to 7 Pin DIN Connector


### Additional Data

Protection type	IP 2
Relative humidity	30% - 75%
Ambient temperature	+10°C - +40°C
Power supply	wide input voltage range 12-29 V DC
Wireless Radio/s	Bluetooth 4.0, Wi-Fi
Bluetooth	4.0 Low Energy
Wi-Fi	802.11 b/g/n
Configuration	Apple iOS App, Android App (coming soon)
Requirements	Wi-Fi access with Internet, Amazon Echo (Alexa Voice Hub)
Connection options	1-3 actuators

Note: Responsibility for OKIN products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which OKIN products are fitted. We accept no liability for the correctness.

DewertOkin GmbH • Weststraße 1 • 32278 Kirchlengern  
Phone: +49 (0)52 23 / 9 79 -0 • Fax: +49 (0)52 23 / 7 51 82 • Email: [info@okin.de](mailto:info@okin.de) • Internet: <http://www.okin.de>

# OKIN Commander ADC

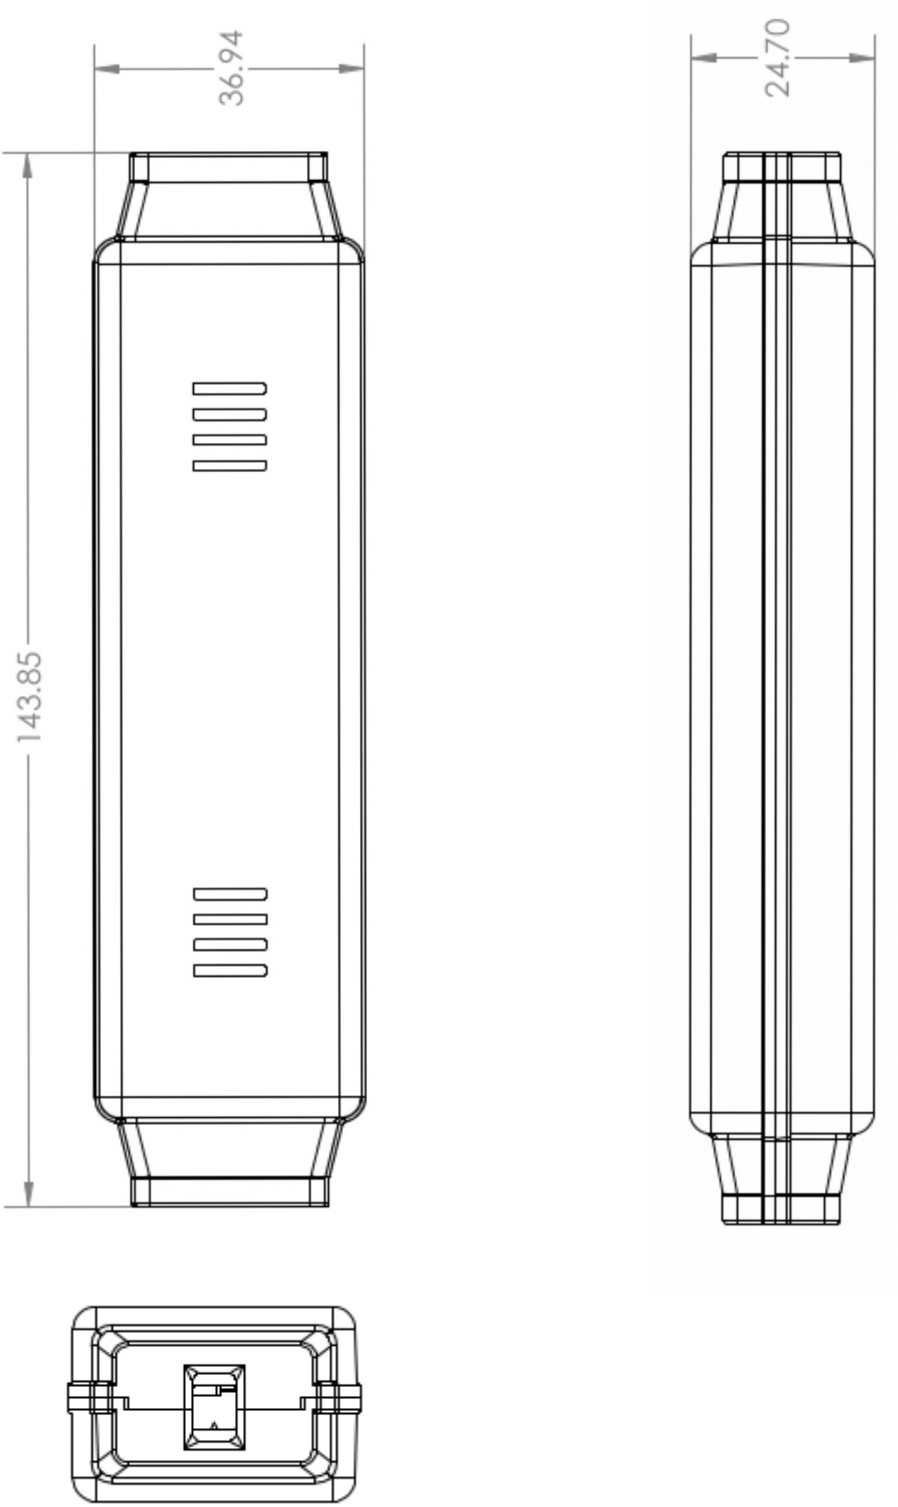

Note: Responsibility for OKIN products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which OKIN products are fitted. We accept no liability for the correctness.